
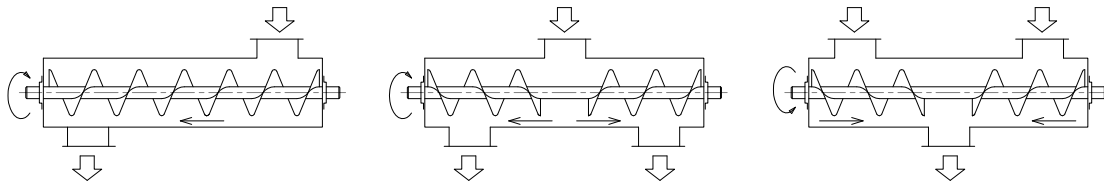


SCREW CONVEYOR

FSC-100 / - 120 / 150 / - 200 / - 250 / - 300

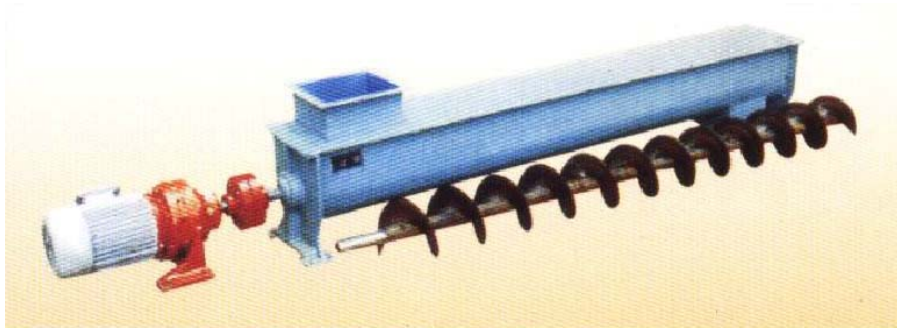

FEATURES:

- The product is led into the conveyor either through a feeding hopper or through a feeding pipe.
- Due to gravitation, the friction between the product and the pipe will be bigger than the friction between the product and the windings. Therefore the product will always be pushed forward and only to a slight degree be transported round with the windings.
- The degree of filling depends on the product to be transported and on the degree of inclination of the auger. For most products, the filling degree will be between 45% and 15%.
- The simple structure of machine, not heavy.
- Easy to operate machine and maintain.
- Low maintenance costs and one-year parts warranty.

TYPE OF SCREW CONVEYORS:

- The product is pushed towards the outlet.
- Distribution of the product to 2 outlets.
- Collection of the product to 1 outlet.

SPECIFICATIONS:

Model	Input Capacity (Ton/hour)	Required power (kW)	Main shaft revolution (rpm)	Outside dimensions LxWxH (mm)			Weight (kg)
				L	W	H	
FSC-100	0.1 – 0.25	0.37-GM1/50	120	6000	Ø100	200	35
FSC-120	0.4 – 0.6	0.75-GM1/50	120	6000	Ø120	250	40
FSC-150	0.7 – 1.0	1.10-GM1/50	120	6000	Ø150	250	45
FSC-200	1.0 – 2.0	1.10-GM1/50	150	6000	Ø200	300	55
FSC-250	2.0 – 5.0	1.50-GM1/50	150	6000	Ø250	350	65
FSC-300	2.0 – 5.0	1.50-GM1/50	150	6000	Ø300	450	80

<p>NPT Group H.O: 161/28/21 Binh Tri Dong Street Binh Tan District, HCMC Vietnam.</p> <p>Tel: +848. 54072938 Cell: +84 918 183 497 Fax: + 848. 62601256 E-mail: engineering@npt-group.com</p>	<p>Varesin B.O: Local 13 Corregimiento Pueblo Nuevo Urbanizacion Las Praderas Panama.</p> <p>Tel/Fax: + 224-2575, 392-3575 Tel/Cell: + 6614-1826 Website: www.faricela.com E-mail: ventas@faricela.com</p>	<p>Distributors:</p>
---	--	-----------------------------